


## HEAVY-CURRENT CHOKES — Shielded Type

Many requirements for chokes or reactors for exciter lamp supply units, floating battery chargers where ripple must be eliminated, machine control units, etc., can be met by the following types. They have maximum inductance and current ratings for their size and will operate continuously at full rated current with 35° C. rise or less.

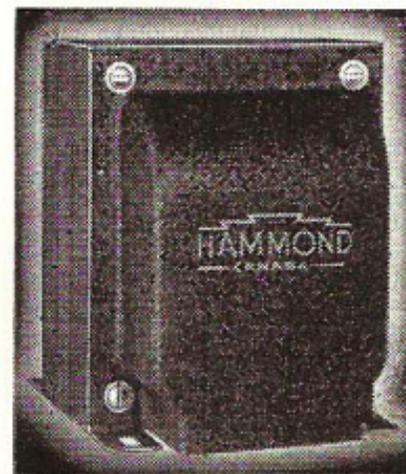

Type	Henrys at Max.	Current Amps. D.C.	Henrys At Oa.	Res. Ohms	Max. Op. Peak Volts	A	B	D	H	W	Wt. Lbs.	Code
192C	0.06	2	0.15	0.70	300	2 $\frac{1}{8}$	2 $\frac{5}{8}$	2 $\frac{1}{2}$	3	2 $\frac{5}{8}$	2 $\frac{1}{2}$	Himba
192F	0.1	2	0.30	1.73	300	2 $\frac{1}{2}$	2 $\frac{1}{4}$	3 $\frac{1}{8}$	3 $\frac{3}{4}$	3 $\frac{1}{2}$	5	Hinla
193F	0.1	3	0.35	0.99	300	3	2 $\frac{3}{4}$	3 $\frac{3}{4}$	4 $\frac{1}{2}$	4 $\frac{1}{4}$	9	Hinno
195F	0.1	5	0.28	0.55	300	4 $\frac{9}{16}$	3 $\frac{3}{4}$	5	6 $\frac{3}{8}$	5 $\frac{1}{2}$	19	Hinre
197D	0.05	10	0.18	0.18	300	4 $\frac{9}{16}$	4 $\frac{3}{4}$	5	6 $\frac{3}{8}$	6 $\frac{1}{2}$	26	Hinso